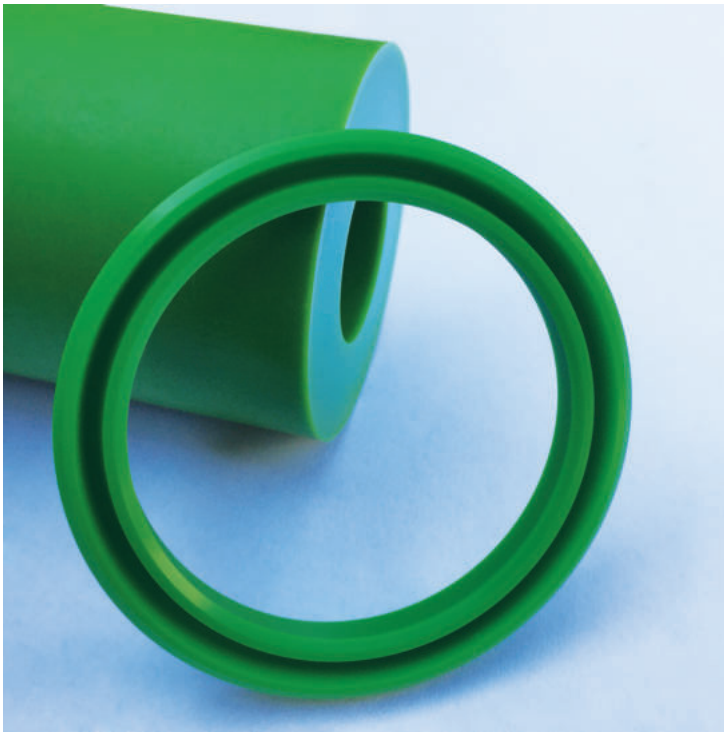

JPU8801 – Low Hardness PU by SmartSeal®



JPU8801 is very flexible and easier to install in tight housing situations and is also used when a “softer” material is needed to have higher compression (preload) of the sealing material.

- ✓ Working Temp. Range: -30°C to 115°C
- ✓ Color: Light Green
- ✓ Easy to install in small grooves
- ✓ Excellent performance in dry air and pneumatic applications

